Junction Box


JB02C-4-WB



- Junction Box fitted with electronic board for junction and equalisation of 4 and 6 load cells.
- Fully encapsulated, water proof and moisture proof.
- Easy connection of the load cells.
- Not weight dependant.



Specifications		
Material	Cast aluminium housing. Protective coasting.	
Load cell output resistance range	340 to 1100 Ω	
Load cell input resistance range	340 to 1100 Ω	
Excitation, recommended voltage	5 to 20V (AC & DC)	
Excitation, maximum	30V (AC & DC)	
Load cell sensitivity range	0.6 - 3 mV/V	
Cable Ø	5 to 6.2 mm	
Correction method	Excitation trim	
Trimming range	24 Ω	
Temperature range, operating	-40° to 85°C	
Housing connected to shield	Yes	
External grounding	No	
IP Class	IP65	
Item No.	Amount of connections	Dimensions (mm)
JB02C-4-WB	4	135 x 65 x 38

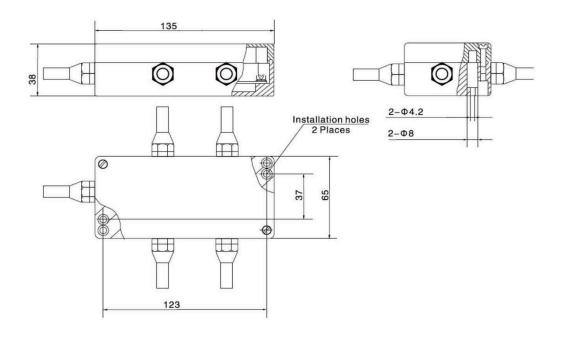

Vetec A/S - Teknikvej 69 - DK-5260 Odense S - Denmark - SE/CVR-no. 27414621 Mail: post@vetec.dk - Phone: 0045 6590 5802