

## Panel Meter

P4


# vetec

- Vetec Panel Meter Display is ideal in combination with load cells.
- Clear, variable brightness display.
- Provided with and without Relay output (alarms) and special output options.
- Very easy to programme and use. No-menu programming.
- High precision and long term reliability.



Specifications					
Digits:	6 digits. 14 mm digit height.				
Viewing:	Up to 7m away.				
Input signals:	Load cells				
	4-20mA, 0-10V, 1-5V etc.				
	Serial Data RS232, RS485 etc.				
Output options:	2 or 4 alarms SPST relays, 2x SPDT.				
	4-20mA, 0-10V or -10 to +10 analog.				
	RS232, RS485, Modbus, Ethernet. RTU Modbus for Tiger G2.				
IP Class	IP65 front				
Materials:	1/8 DIN format case. Black Polycarbonate				
Case dimensions:	W 96 x H 48 x L136 (±1mm)				
Item No.	Digits	Digit Height	Power Supply	Analogue Output	Relay Output
P4-L-R-AC-0	6	14 mm	95-265 VAC	-	0
P4-L-R-DC-0	6	14 mm	11-30 VDC	-	0
P4-L-ANI-R-AC	6	14 mm	95-265 VAC	4-20 mA	0
P4-L-ANI-R-DC	6	14 mm	11-30 VDC	4-20 mA	0
P4-L-AL2-R-AC	6	14 mm	95-265 VAC	-	2
P4-L-AL2-R-DC	6	14 mm	11-30 VDC	-	2
P4-L-ANI-AL2-R-AC	6	14 mm	95-265 VAC	4-20 mA	2
P4-L-ANI-AL2-R-DC	6	14 mm	11-30 VDC	4-20 mA	2
P4-L-ANI-R-AC	6	14 mm	95-265 VAC	4-20 mA	0
P4-L-485-R-AC	6	14 mm	95-265 VAC	RS485	0
P4-L-RTU-R-AC	6	14 mm	95-265 VAC	MODBUS RTU (Tiger)	0
P4-L-AL2-RTU-R-AC	6	14 mm	95-265 VAC	MODBUS RTU (Tiger)	2

\*The listed examples are all with load cell input. Other displays can be provided to meet specific requirements and applications.

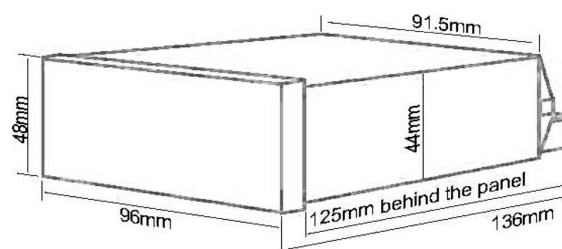

Vetec A/S - Teknikvej 69 - DK-5260 Odense S - Denmark - SE/CVR-no. 27414621

Mail: post@vetec.dk - Phone: 0045 6590 5802