

Blue Line Dynamometer

Ver. 1.0

vetec


- Highly accurate and reliable, $\pm 0,4\%$ FS accuracy.
- Very clear red digit LED display. Visible at long distances / in bright daylight.
- IP Class 67. Ideal for wet environments.
- Robust high strength aluminium construction for use in hostile environments.
- Supplied with full certificate of calibration.
- Delivered in hard case.
- Designed and manufactured in Denmark for high quality assurance.



Specifications	
Versions	231201
Capacity	12,5T
Accuracy (%)	+/- 0,4%
Accuracy (Kg.)	+/- 50 kg.
Safe overload (%)	110%
Safe overload (Kg.)	13750 kg.
Breaking limit	500%
Hysteresis	10 kg.
Material	High strenght aluminium housing. Anodized blue surface treatment
IP class	IP 67
Display	Bright LED
Digit height	14 mm
Digit color	Red
Operating time	16-20 hours (Operating at low temperatures will decrease the operating time)
Operating temp.	-20°C to +50°C**
Batteries	Built-in Li-ion
Charger	High quality USB charger

*Rounded due to display resolution.

Item No.	Capacity (T)	A (mm)	B (mm)	C (mm)	D (mm)	Ø (mm)	Weight (Kg.)	Incre. (Kg.)
231201	12,5T	300.00	125.00	200.00	42.00	37.00	3,21	10

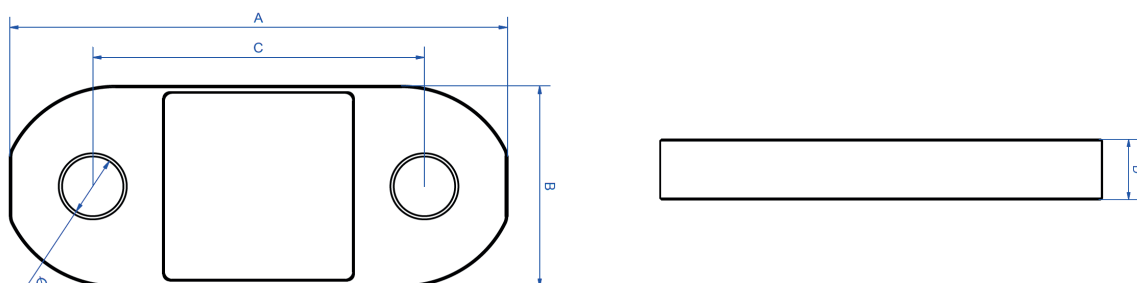

Vetec A/S - Teknikvej 69 - DK-5260 Odense S - Denmark - SE/CVR-no. 27414621

Mail: post@vetec.dk - Phone: 0045 6590 5802