

V-link Dynamometer



670301, 670601, 671201, 672501, 675501


- Highly accurate and reliable, $\pm 0,2\%$ FS accuracy.
- Very clear red digit LED display. Visible at long distances / in bright daylight.
- IP Class 67. Ideal for wet environments.
- Robust high strength steel construction for use in hostile environments.
- Supplied with full certificate of calibration.
- Delivered in hard case made from hard ABS plastic.
- Designed and manufactured in Denmark for high quality assurance.
- Bluetooth versions allow long-range (Class 1) and short-range (Class 2) communication with cloud service for data logging.
- Compatible with wireless V-link Handheld Display.



Specifications							
Standard versions	670301	670601	671201	672501	675501	-	-
Bluetooth versions	670302	670602	671202	672502	675502	6710002	6712002
Capacity	3.25T	6.5T	12T	25T	55T	100T	120T
Accuracy (%)	+/- 0.2% FS						
Accuracy (Kg.)	+/- 7,5 Kg.*	+/-15 Kg.*	+/-30 Kg.*	+/-50 Kg.*	+/-120 Kg.*	+/-200 Kg.*	+/-250 Kg.*
Safe overload (%)	110%						
Safe overload (Kg.)	3575 Kg.	7150 Kg.	13200 Kg.	27500 Kg.	60500 Kg.	132000 Kg.	132000 Kg.
Breaking limit	500%						
Resolution	1 Kg.	5 Kg.	10 Kg.	10 Kg.	20 Kg.	-	-
Material	High strength steel housing. Fe/Zn12 Chromit surface treatment according to ISO 2081						
IP class	IP 67						
Display	Bright LED						
Digit height	14 mm						
Digit color	Red						
Operating time	16-20 hours (Operating at low temperatures will decrease the operating time)						
Operating temp.	-20°C til +50°C**						
Batteries	Built-in Li-ion						
Charger	High quality USB charger						

*Rounded due to display resolution.

Item No.	Capacity (T)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Ø (mm)	Weight (Kg.)	Incre. (Kg.)
670301 / 670302	3,25T	200.00	112.00	90.00	210.00	15.00	20.00	1.55	1
670601 / 670602	6.5T	200.00	115.00	117.00	260.00	41.50	31.00	4.47	5
671201 / 671202	12.5T	230.00	115.00	117.00	281.00	41.50	37.30	5.65	10
672501 / 672502	25T	230.00	115.00	117.00	338.00	41.50	54.00	7.56	10
675501 / 675502	55T	282.00	115.00	155.00	440.00	46.00	73.00	16.93	50
6710002	100T	-	-	-	-	-	-	-	-
6712002	120T	-	-	-	-	-	-	-	-

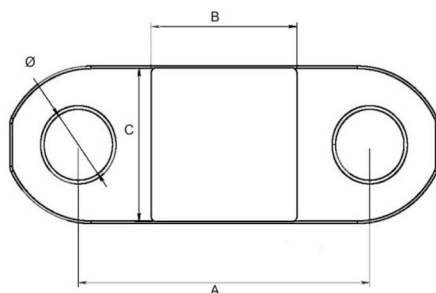

Vetec A/S - Teknikvej 69 - DK-5260 Odense S - Denmark - SE/CVR-no. 27414621

Mail: post@vetec.dk - Phone: 0045 6590 5802